

**Models:**

IIC4701: 4 to 20mA Controller - Direct Acting  
IIC4801: 4 to 20mA Controller - Reverse Acting

**IIC4701 & IIC4801****Single Term Current Sensing Controllers****Specifications****Power Supply**

- Voltage: 24VAC ±10% @ 50/60 Hz
- Power Consumption: 2VA max

**Loop Supply**

- 24VDC current limited to 25mA maximum

**Inputs**

- 4-20mA DC across 140 ohms to signal common
- Reset (0-10VDC)

**Outputs**

- Detector out (0-10VDC = 0-100% of 4 to 20mA range)
- Set Point Out (0-10VDC = 0-100% of 4 to 20mA range)
- One 0-10VDC control output

**Terminal Identification**

1	24V 25mA DC loop supply for detector
2	4 to 20mA input
3	% of input range i.e. 5VDC = 50%
4	Reset (0-10VDC)
5	12VDC aux. supply
6	Set Point Out as % of range
7	0-10VDC Direct Acting output on IIC4701 only
8	0-10VDC Reverse Acting output on IIC4801 only
9	Common and 0VAC supply
10	24VAC supply

**Temperature Ratings**

- Storage: 0-50°C non condensing
- Operating: 0-40°C non condensing

**Enclosure**

The IIC4701 and IIC4801 are housed in a rectangular case suitable for DIN Rail mounting. The housing is moulded from flame retardant plastics recognised by UL as UL 94-V0.

Colour: Grey


Dimensions (max): 75 mm(w) x 155 mm(h) x 97 mm(d)

**Installation**

1. Mount controller in a dry and reasonably clean location free of excessive vibration.
2. Fit to DIN rail.
3. Wire in accordance with INNOTECH connection diagrams and local bylaws or refer to your local distributor.

**Wiring**

1. Earth one side of the 24VAC at the transformer.
2. Connect the EARTHED side of 24VAC to terminal 9.
3. DO NOT connect 24VAC to terminals 1 through 8.

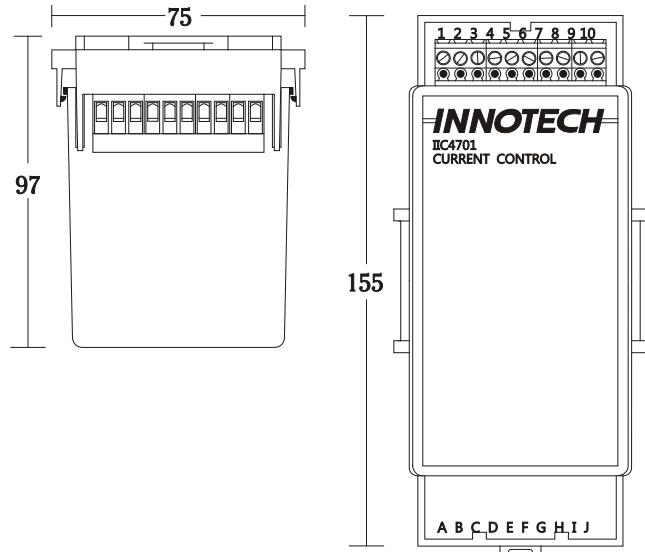**Applications**

The Innotech single term current sensing controllers are designed to accept a 4 to 20mA input and to produce a single 0-10VDC control signal output. The input to the controller can be any temperature, humidity or pressure detector which produces a 4 to 20mA output. The power to the input device can be provided by the controller.

The controller's output can be coupled to auxiliary units such as humidifiers, chilled water valves, damper motors, staging relays and signal selectors which require a 0 to 10VDC control signal.

**Features**

- Interface to Building Automation Systems
- Time integrated proportional control action for optimum system performance
- 0-10VDC Direct Acting control signal output on IIC4701
- 0-10VDC Reverse Acting control signal output on IIC4801
- Proportional band adjustment from 1 to 11%
- Percent of range of input easily read at controller
- Set Point easily read at controller as percent of range
- Factory set for most applications resulting in reduced commissioning time
- The Innotech enclosure saves space and reduces installation time
- Wide range of applications
- Internal tamper proof Set Point adjustment

**Approvals**

The IIC4701 and IIC4801 conform to:

- Requirements according to standards EN55014 (CISPR14) for RCM Labelling

**Set Point**

The Set Point is adjustable over a range of 0 to 100% via the Set Point pot.

0%	4mA
100%	20mA

**Proportional Band**

The Proportional Band is adjustable over two ranges:

narrow	0.2 to 2.0% PB WIDE Link Open
wide	1.0 to 11% PB WIDE Link Closed (factory setting)

**Ramp Up and Ramp down**

The Ramp UP and Ramp DOWN rates are separately adjustable. The ramp UP time can be adjusted over a range of 1.5 to 12 minutes. This is the time taken for the output voltage to rise from 0V to 10VDC.

The ramp DOWN time can be adjusted over a range of 20 seconds to 1.5 minutes. This is the time taken for the output voltage to fall from 10 to 0VDC with the difference between the Set Point and Temperature Out no greater than the PB setting.

**Reset**

The Set Point can be reset UP or DOWN by a maximum of 10% by a 10VDC external signal applied to terminal 4. The effect of the Reset input is adjustable from 0 to 10% by varying the RESET pot.

The amount of Reset can be determined by measuring terminal 6 as the RESET pot is adjusted.

 This function requires a factory link change to be enabled.

**Dead Zone and Output Kill**

The Dead Zone pot adjusts the point where the Output Kill feature is activated. The range of adjustment is from 0 to 0.5% below (IIC4701) or above IVC8701 the Set Point.

While the voltage measured at Detector Out is within the Dead Zone setting, the output at terminal 7 (for IIC4701) or 8 (for IIC4801) is allowed to ramp down at the rate set by the Down Ramp. When the voltage falls below (IIC4701) or rises above (IIC4801) the Dead Zone setting, the output is rapidly reduced to zero.

**Output Voltage Range**

The controlled range is from 0 to 10VDC but to ensure proper operation on units connected to the outputs, the output voltage goes 0.3VDC negative to ensure the OFF condition and 10.5VDC to ensure the ON condition.

**DIN Rail Mounted Enclosure**

The Innotech enclosure is designed to provide tight positive locking to varying thicknesses of DIN rail. When fitting to thick DIN rail, it may be necessary to remove the packing tabs on the back of the base.


Lugs on each side of the base ensure that correct spacing is maintained between units on the same DIN rail.

**Time Integrated Proportional Output**


The IIC4701 and IIC4801 single term controllers are proportional controllers with their outputs time integrated. The rate of change of the output voltages is derived from the difference between the measured value and the Set Point.

The steady state voltage of the 0-10VDC outputs is proportional to the difference between the measured value and the Set Point. When a disturbance occurs in the system, time integration causes the 0-10VDC output to change at a rate proportional to the difference between the measured value and the Set Point. Thus a large disturbance will cause the output voltage to change at a faster rate than a small disturbance.


As the system recovers from a disturbance, the difference between the measured value and the Set Point will decrease and thus reduce the rate of change of the output voltage. This occurs when the difference between the measured value and the Set Point is half of the PB setting.

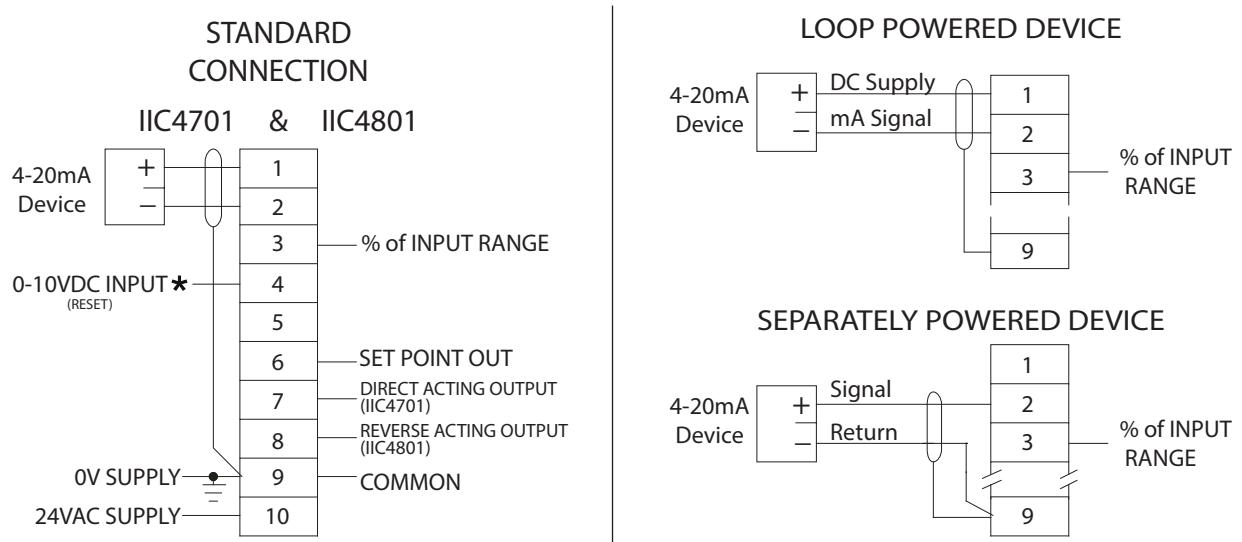


**\* RESET FROM INTERNAL SUPPLY**

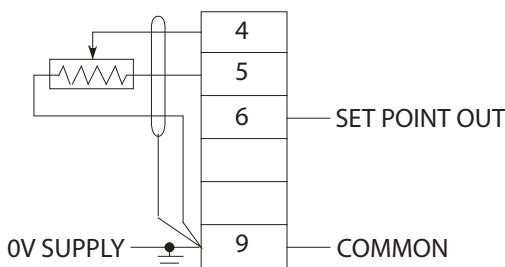

Screened Cable should be used to reduce EMI.

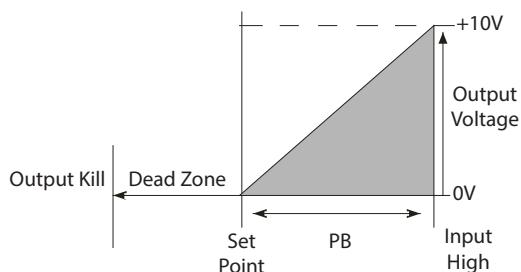

Operation & Control Function  
 for the IIC4701

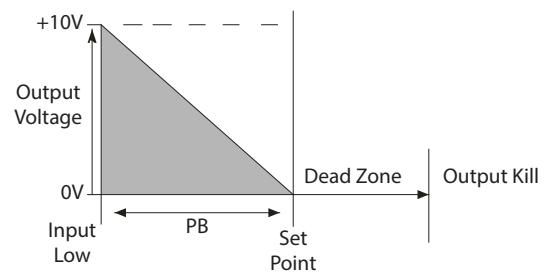

Operation & Control Function  
 for the IIC4801

**\* Requires link changes before this option is used**

This page has been left intentionally blank.

---

**INNOTECH**<sup>®</sup>

Australian Owned, Designed & Manufactured  
by Mass Electronics Brisbane

**Phone:** +61 7 3421 9100   **Fax:** +61 7 3421 9101  
**Email:** [sales@innotech.com.au](mailto:sales@innotech.com.au)   [www.innotech.com.au](http://www.innotech.com.au)

YOUR DISTRIBUTOR