

Models:

SK8CM	1 x DI, 3 x UI, 2 x DO, 2 x UO – BACnet MS/TP
SK8CE	1 x DI, 3 x UI, 2 x DO, 2 x UO – BACnet IP
SK8CD	1 x DI, 3 x UI, 2 x DO, 2 x UO – BACnet MS/TP and BACnet IP
SK8CM-UO	1 x DI, 3 x UI, 4 x UO – BACnet MS/TP
SK8CE-UO	1 x DI, 3 x UI, 4 x UO – BACnet IP
SK8CD-UO	1 x DI, 3 x UI, 4 x UO – BACnet MS/TP and BACnet IP

DS 40.01

February 2024

Overview

The Innotech SKIA is a digital, programmable controller, with native BACnet connectivity, that can control a variety of residential, industrial and commercial systems.

Featuring a mix of digital and universal inputs and outputs the SK8Cx provides a highly flexible solution for common small point count, and distributed point applications.

SKIA controllers are fully programmable via Innotech Focus graphical programming interface software.

Features

- 8 Point Controller with the following I/O types:
 - 1 x Digital Input (DI)
 - 3 x Universal Input (UI)
 - 2 x Digital Output (DO) or 0 x DO for SK8Cx-UO
 - 2 x Universal Output (UO) or 4 x UO for SK8Cx-UO
- 1 x RS-485 terminal (SK8CM/-UO & SK8CD/-UO Only)
- 2 x RJ45 Ethernet – In Switch Mode (SK8CE/-UO & SK8CD/-UO Only)
- Dedicated Innotech Smart Sensor (ISS) communications port
- Colour coded pluggable terminals for easy identification
- Communication LEDs for all interfaces
- Status LED
- Easily programmed with Innotech Focus software
- DIN rail mountable

Applications

The SKIA Controller is a small point count device ideally suited to HVAC, Building and Energy Management, automation, and process control where it can monitor and control a variety of external plants and equipment.

The SKIA provides a high point count density in a compact form factor and is suited to distributed point applications where available space may be restricted.

The creation of control logic strategies is achieved with Innotech Focus engineering software. Focus' user friendly graphical programming interface provides power tools for the user to create a project-wide control strategy.

Typical applications include:

- Air conditioning and heating systems
- Lighting control
- Monitoring device
- Distributed I/O points controller
- Cold/Freezer Rooms



(SK8CD Model shown for illustration)

Installation

The controller should be installed in an environment that does not exceed the maximum operating parameters of the device. It should be mounted in a clean and dry environment free of vibration, and properly ventilated.

The controller should be mounted horizontally on a DIN rail in cabinets approved for switchgear or industrial control equipment.

Wiring should be implemented in accordance with Innotech connection diagrams and installation instructions as well as local bylaws. Refer to your local distributor for more information.

Connect the 24VAC or 24VDC supply to the correct terminals on the controller. Maximum terminal cable entry is 1.5mm².

Model Specifications

Controller Name	SK8CM	SK8CM-UO	SK8CE	SK8CE-UO	SK8CD	SK8CD-UO
Digital Inputs	1		1		1	
Universal Inputs	3		3		3	
Digital Outputs	2	0	2	0	2	0
Universal Outputs	2	4	2	4	2	4
Block Cycle Time	500ms		500ms		500ms	
RS-485 Ports	1		-		1	
Ethernet Ports	-		2		2	
USB-Mini B (PC Link)	Yes		Yes		Yes	
Innotech Smart Sensor Support	1		1		1	
Max. Power per Output	0.8W		0.8W		0.8W	
Max. IO System Power	3.6W		3.6W		3.6W	

General Specifications

PROCESSOR		
CPU	ARM Cortex M7	
Processor Speed	550MHz	
POWER SUPPLY REQUIREMENTS		
Power Input	24VAC or 24VDC ±10%	
Recommended Transformer Ratings	15VA min. (plus I/O load)	
Power Consumption	5W (plus I/O load)	
The operating voltage must meet the requirements of Safety Extra Low Voltage (SELV) to EN60730. The transformer used must be a class 2 safety transformer in compliance with EN60742 and be designed for 100% duty. It must also be sized and fused in compliance with local safety regulations.		
ENVIRONMENTAL		
Operating Temperature	-20° to 70°C non-condensing -4° to 158°F non-condensing	
Storage Temperature	-40° to 80°C non-condensing -40° to 176°F non-condensing	
INSTALLATION ORIENTATION		
Horizontally mounted DIN rail on a vertical surface. Allow a minimum 20mm (40mm recommended) gap between the end of the terminal plug and cable ducts.		
ENCLOSURE		
Housed in a rectangular case suitable for DIN rail mounting. Housing moulded from flame retardant plastics recognised by UL as UL94-VO.		
Colour	Dark Grey	
DIMENSIONS AND WEIGHT		
W 124.6mm x H 111.8mm x D 40.0mm (4.90" x 4.40" x 1.57")		
SK8CD weight with all terminals fitted approx. 235g (0.52lbs)		
CLOCK		
Internal Real Time Clock	Not Battery Backed	
BACnet Time Sync	Receive Only	
ISS Time Sync	For Stand-alone Applications	
APPROVALS AND LISTINGS		
EN 61326:2021 (IEC 61326:2020) Class B for CE & RCM Labelling		
Title 47 CFR, Part 15, Subpart B, Class B for FCC Marking		
UL Listed to UL916, File Numbers PAZX.E242628, PAZX7.E242628		
RoHS3		
Listed by BTL (B-ASC profile)		
Ingress Protection Rating – IP2X		
COMMUNICATIONS		
Ethernet	100 Base-T Dual Ports - Switch Mode Only	
RS-485 Comms	Up to 115kbps (with EOL)	
ISS Comms	Innotech Smart Sensor Comms	

PROTOCOLS		
Ethernet	BACnet IP	Default IP - 192.168.2.100
RS-485	BACnet MS/TP	

DEFAULT ADDRESS		
BACnet		2200

CONFIGURING / MONITORING / COMMUNICATIONS		
USB Device (Mini-B Type)	Innotech Net Comms	Fixed #1 Address
Data Logging	Not Supported	

LED INDICATION		
Comms LEDs for RS-485	Red – TX, Green - RX	
Heartbeat LED	Status OK Fault Request Power Fail	Green Flash Red Flash Orange Flash Slow Orange Flash
		<i>① Request LED shown when upgrading, config transfer, initialising etc.</i>

Inputs & Outputs

DIGITAL INPUT	
Max Pulse Count Frequency	1kHz
Max Digital Input Response Rate	½ block cycle rate
Max Digital Input Voltage	24V AC or DC
Digital Switching	On > 5VDC Off < 2VDC
Digital Mode	Contact or Voltage

DIGITAL OUTPUT	
Switch Mode	High Side Switching
Inrush and short circuit protection	Self-Resetting Thermal Fuse
Switch Current	140mA
Maximum Available Power	70mA

UNIVERSAL INPUTS	
Digital Input Configuration	
Max Digital Input Response Rate	½ block cycle rate
Max Digital Input Voltage	24V AC or DC
Digital Switching	On > 4VDC Off < 2VDC
Digital Mode	Contact or Voltage

UNIVERSAL OUTPUTS	
Voltage Output Configuration	
Range	0VDC to 10VDC
Resolution	12bit @ 4096 steps
Impedance	~100Ω
Maximum Current	20mA
Accuracy	±1.5% of reading @ 20°C (68°F) & R _{load} > 10kΩ
Drift	±150ppm/°C

Sensor Input Configuration	
Supports	Thermistor High, Thermistor Low
Range	0 to 5VDC
Resolution	16bit @ 65536 steps
Accuracy	±1.5% of reading @ 20°C (68°F)
Drift	±150ppm/°C

Voltage Input Configuration	
Range	0 to 10VDC
Resolution	16bit @ 65536 steps
Max Input Voltage	24V AC or DC
Accuracy	±1.5% of reading @ 20°C (68°F)
Drift	±150ppm/°C

Pulse Width Modulation (PWM) Output Configuration	
Frequency Range	12.5Hz
High Side Switching	On = 12VDC Off = Open
Duty Cycle Resolution	0.05%
Duty Cycle Range	0 to 100%

Digital Output Configuration	
High Side Switching	On = 12VDC Off = Open
Inrush and short circuit protection	Self-Resetting Thermal Fuse
Switch Current	140mA
Maximum Available Power	70mA

FCC CLASS B & ISED NOTICE

This device complies with Part 15 of the FCC Rules and with the ISED Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.


Note – This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: (Refer to Section 15.21 of 47 CFR)

Any changes or modifications not expressly approved by Innotech could void the user's authority to operate this equipment.

SKIA SK8CxController Dimensions & Parts Identification

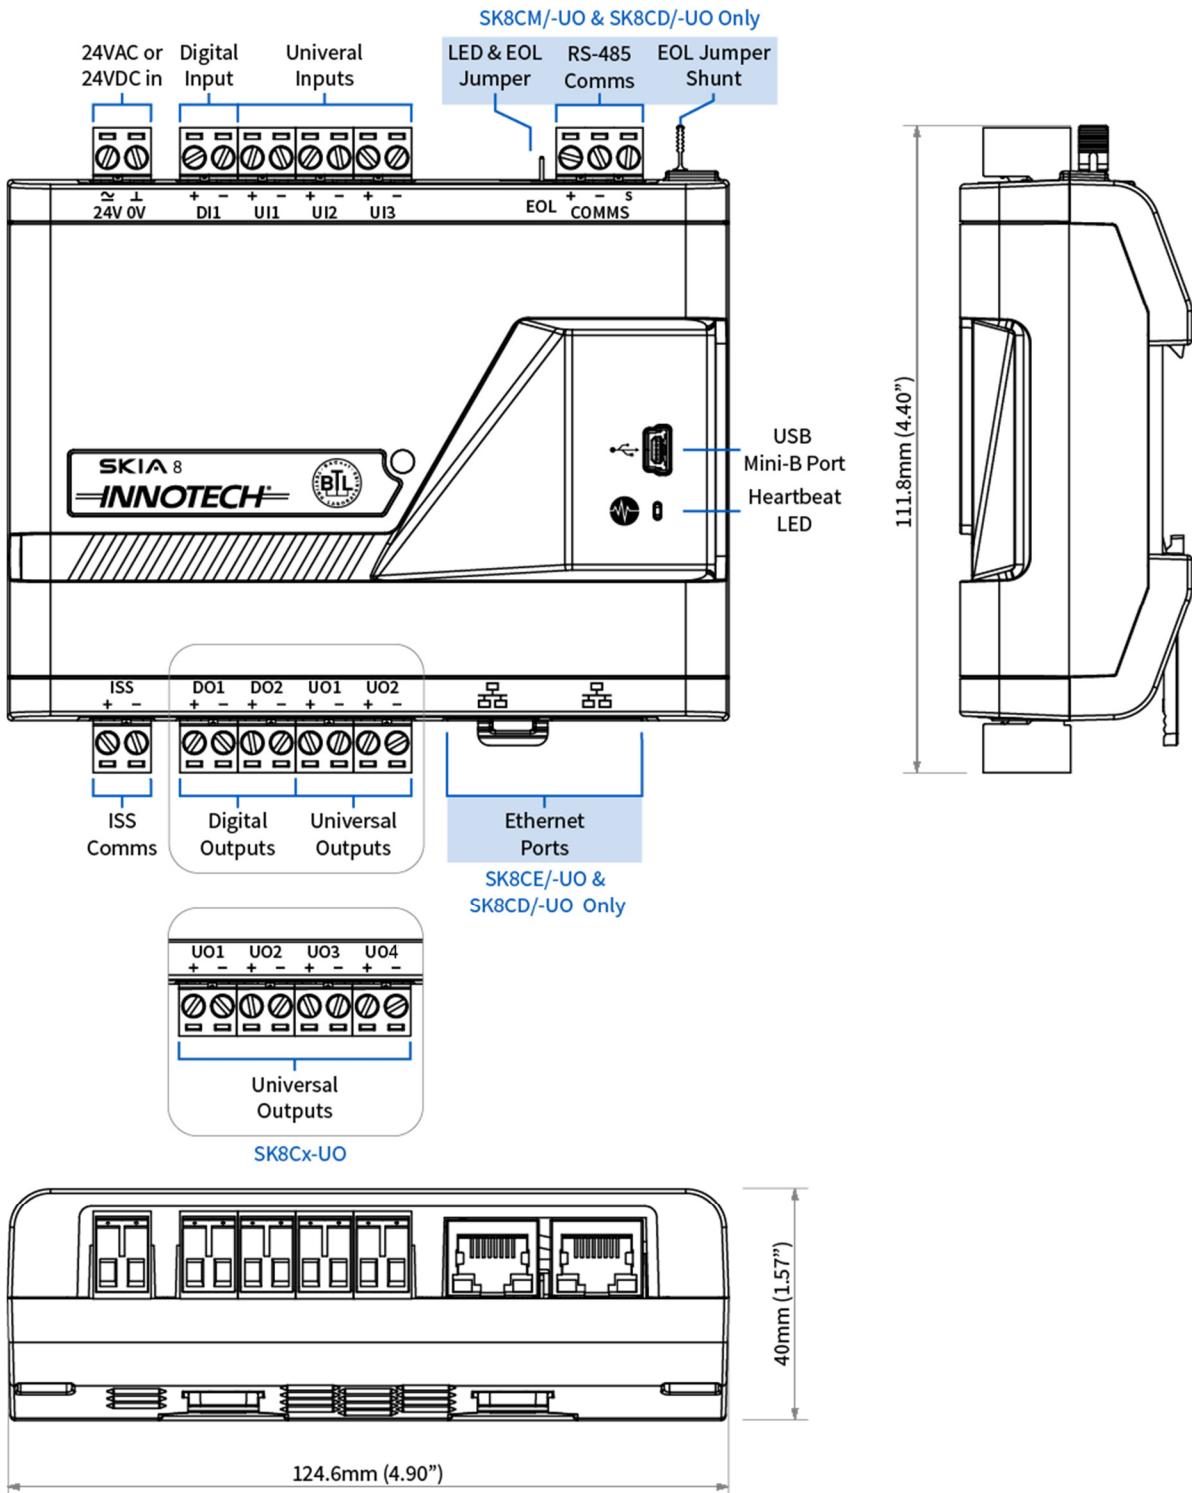

📞 +61 7 3421 9100

✉️ sales@innotech.com

🌐 www.innotech.com

Australian Owned, Designed & Manufactured
 by Mass Electronics Brisbane

INNOTECH®