

Models:

ES3-2 3 Speed Fan, 1 Cool (PWM) & 1 Heat Controller

ES3-2

Ecostat 3 Controller

Specifications

Power Supply

Voltage: 240VAC ±10% @ 50/60Hz


Power Consumption: 3VA Max.

Input

10kΩ Thermistor temperature sensor
Switched Contact for Standby Select
Switched Contact for Remote Disable

Outputs

Relay 1 to 3	Voltage free relay contacts
SPDT	8A Resistive
Relay 5	Voltage free relay contacts
SPST	16A Resistive
	6A Inductive
PWM Output	Isolated triac - 240VAC ±10%
	1.5A Resistive

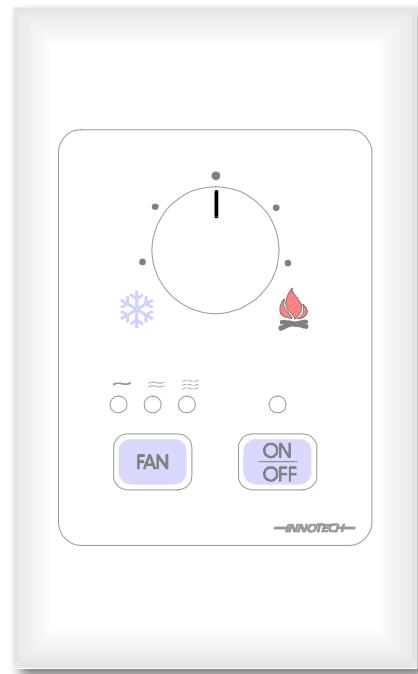

Connection between Controller and Control Station

- 5 way connection via 4 core plus screen cable

Controller Terminal Identification

SEN	Temperature Sensor Input (10kΩ thermistor)
COM	Common for Sensor, Remote Disable and Standby Functions
DOR	Remote Disable (Contact Open)
SBY	Standby Disable (Contact Closed)

Input Terminal Identification

240V power connection to Control Unit (right hand side)

E	Earth
N	Neutral Supply
L	Mains 240VAC Supply

Output Relays:

Terminals			
Relays	O	I	C
1 to 3	Normally Open Contact	Normally Closed Contact	Common Contact
5	Normally Open Contact	No Connection	Common Connection
PWM Output	No Connection	Normally Open Connection	Common Connection

Enclosure

The control is provided in 3 parts. The wall mounted Control Station, Remote Controller and a bead type Return Air Detector.

Control Station

- Innotech Switchplate
- 115mm x 72mm x 30mm

Controller

Plastic Enclosure manufactured from an ignition resistant grade of ABS which meets the requirements of AS2420.

Colour Grey

Dimensions (max.) 188mm x 163mm x 65mm

Return Air Detector

- Bead Type Thermistor
- 3mm Bead with 3 metre lead

Applications

The Innotech Ecostat 3 Controller is designed to be used in commercial applications to provide complete control for air conditioning systems, which have Pulse Width Modulated chilled water valves.

Features

- Control Station fits standard electrical wall plates
- Four core screened cable simplifies connection between the Controller and Control Station
- Adjustable Proportional Band, Dead Zone and PWM Actuator On Time to facilitate startup
- 8A relays for all fan speed, 16A for heat functions and 1A triac for cool function
- LED indication of relay status.
- Remote Disable and Standby Functions.

Installation

1. Mount controller in a dry and reasonably clean location free of excessive vibration.
2. Wire in accordance with INNOTECH connection diagrams and local bylaws or refer to your local distributor.

 This product should only be installed by qualified personnel.

Temperature Ratings

Storage: 0-50°C non-condensing
Operating: 0-40°C non-condensing

Wiring

1. Connect the 240VAC supply to the correct terminals, observing the correct polarity of the connections.
2. Connect the EARTH to the correct terminals on all units.
3. DO NOT connect 240VAC to the control terminals on the left hand side.
4. Ensure that the wiring between the wall mounted Control Station and the remote control board is correctly connected. Failure to do so will result in malfunctioning and may damage either or both units.
5. The maximum wire length between the Control Station and the Controller should not exceed 15 metres. The wiring between these devices should not be run in parallel with conductors carrying high current.

Ecostat Setting and Information

Set Point Adjustment Range

The Ecostat is calibrated to provide Control Station setpoint adjustment of 23°C +/- 3°C.

To alter the range, adjust the potentiometer "SSP" located on the Controller. When adjusted fully clockwise, the range is 23°C +/- 6°C. When adjusted fully counter-clockwise, the range is 23°C +/- 0.5°C.

To change the midpoint from 23°C, adjust the potentiometer "CAL" located on the Controller. As an example, if a midpoint of 21°C is required, set the Control Station setpoint adjuster to midpoint when the temperature at the temperature sensor equals 21°C. It may be necessary to heat or cool the room to the desired value. Adjust the "CAL" potentiometer until the control is neither heating or cooling.

Supply Fan Run On

If the Ecostat is operating in heating mode and it is turned off at the Control Station, the supply fan will continue to run for 30 seconds in low speed but the fan speed LEDs will be off. The fan LED on the controller will remain on for the fan run period. This is to remove any residual heat when the electric heat elements are used.

 The Supply Fan Run On time is not field adjustable.

Standby Function

The Ecostat is equipped with a standby function which when enabled will increase the Dead Zone to be 2 times the Proportional Band (PB) setting. For example, if the PB is 2°C, the Dead Zone will be 4°C when the unit is in Standby mode. To enable the function, remove link "S" from the Controller.

Remote Disable

The Ecostat is equipped with a remote disable function. If the Remote Disable switch is open, the Ecostat will run for 30 seconds and shut down the Air Conditioning unit.

When the Remote Disable switch is closed, the unit can be restarted by pressing the ON button. To enable this function remove link "D" from the Controller.

Proportional Band

The Proportional Band (PB) factory setting is 2°C, this results in a differential of 1°C for heating and 1°C for cooling.

To alter the PB, adjust the "PB" potentiometer located on the Controller. When adjusted fully clockwise, the PB is 10°C. When adjusted fully counter-clockwise, the PB is 1°C.


Dead Zone

The Dead Zone (DZ) is factory set to 25%. This represents 25% of the PB setting. If the PB is 2°C, the DZ will be 0.5°C.

To alter the DZ, adjust the "DZ" potentiometer located on the Controller. When adjusted fully clockwise, the Dead Zone is 60% of the Proportional Band. When adjusted fully counter-clockwise, the DZ is 10% of the PB.

Time

The Time potentiometer adjusts the cooling outputs PWM rate to determine the valve balance point.

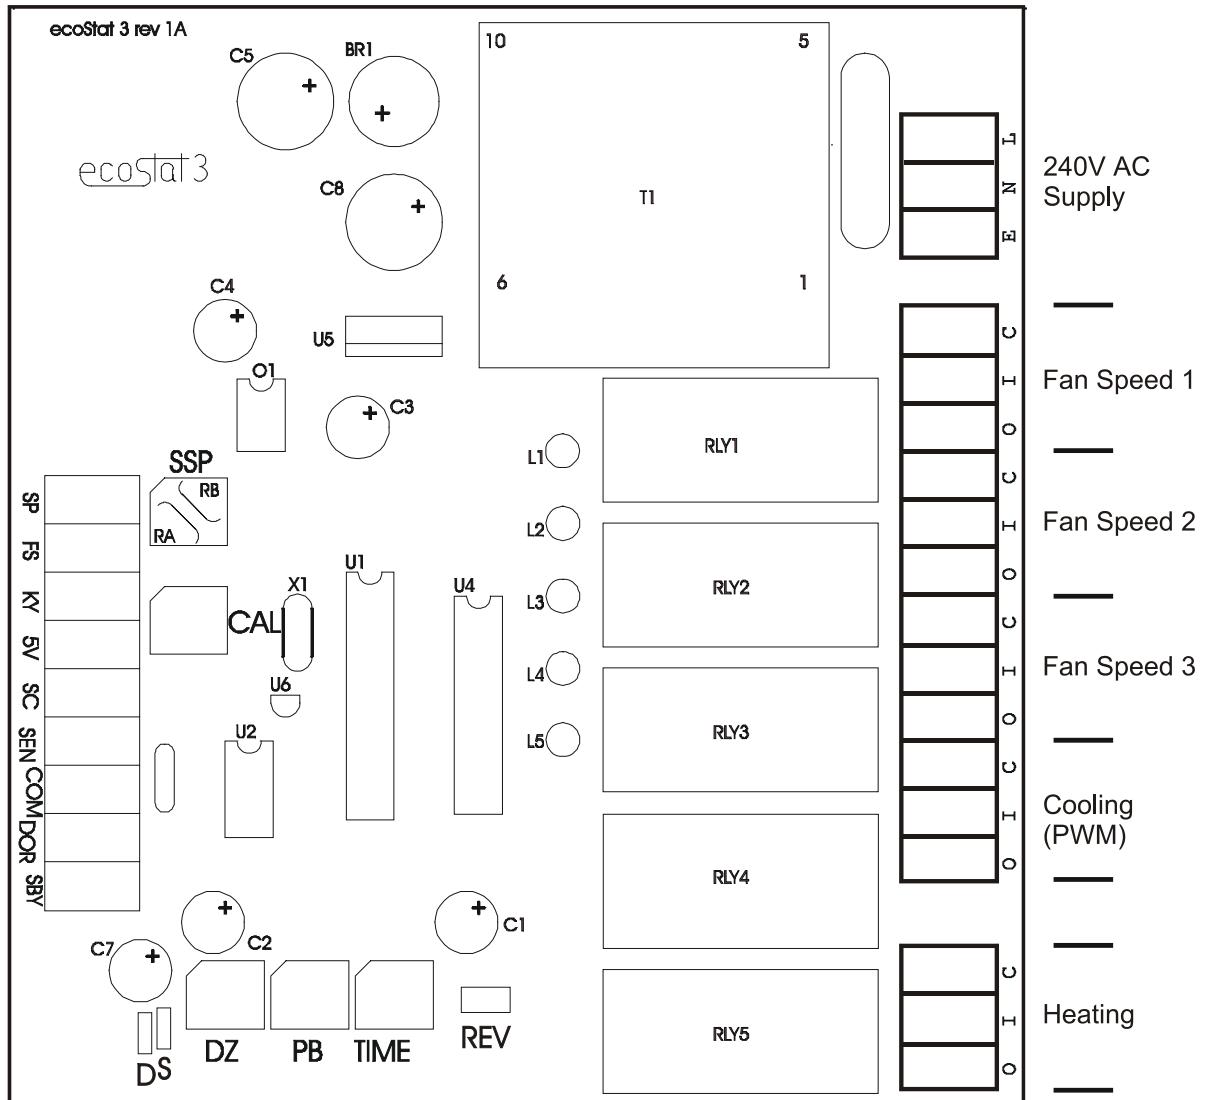

DZ = Dead Zone - Range 10% to 60%.

PB = Proportional Band - Range 1°C to 10°C.

TIME = Compressor Restart Time - Range 1 sec to 4 min 15 sec.

REV = Reversing Valve Link.


SSP = Amount of Adjustment at the Control Station setpoint - Range 1°C to 12°C.

CAL = Use to calibrate the midpoint of the Control Station setpoint adjustment.

D = Remote Disable Link.

S = Standby Link.

ES3-2 STANDARD CONNECTION

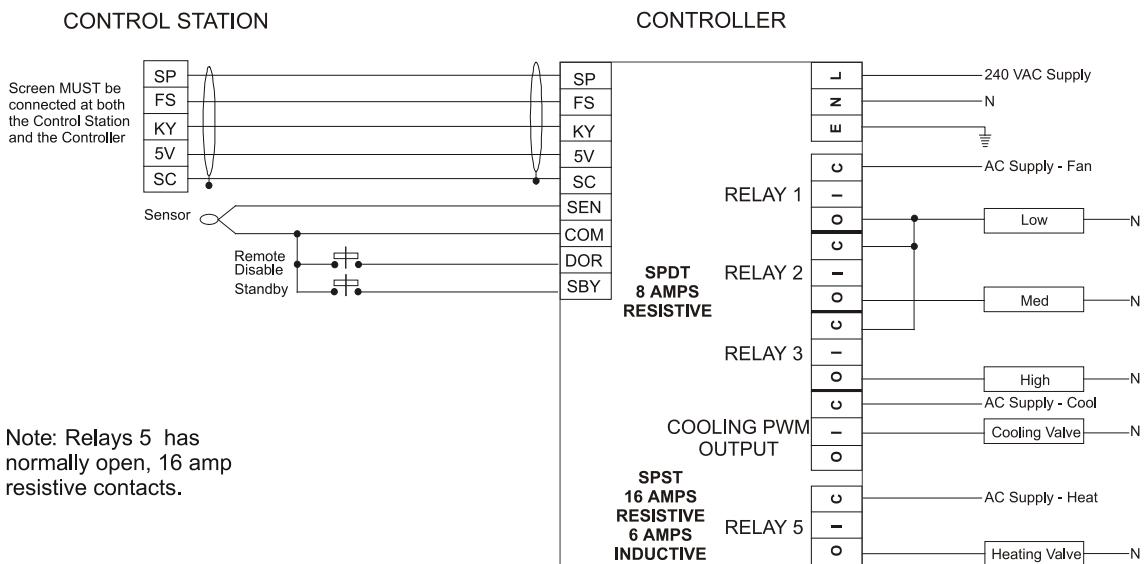

N.B. Link "REV" must be open.

* MAXIMUM CABLE LENGTH BETWEEN THE CONTROL STATION & CONTROLLER IS 15 METRES.

INNOTECH®

Australian Owned, Designed & Manufactured
by Mass Electronics Brisbane

YOUR DISTRIBUTOR